

For more information please visit www.matrixtacticalsystems.com


















/!\ WARNING Cancer and reproductive harm. p65warnings.ca.gov

INSTRUCTION MANUAL


RAYSTAR ATS RS4

- *This product is suggested for 18 year-old users or older.
- *Always wear goggles when using this product.
- *Read the entire manual to ensure proper usage.
- *Incorrect use may cause injury or death.
- *Never point the muzzle at a person or object that you do not intend to shoot
- *Do not adjust the motor without authorization or by a certified technician.
- *Buyers and users must comply with the laws and regulations defined by the local authority.


FIRING MODE & SAFETY



Safety On / The gun will not fire.




Semi Auto / Single shot.




Full Auto / Automatic firing.


QUICK RELEASE DEVICES IN STOCK, F/R SIGHT, HANDGUARD, QR HIDER

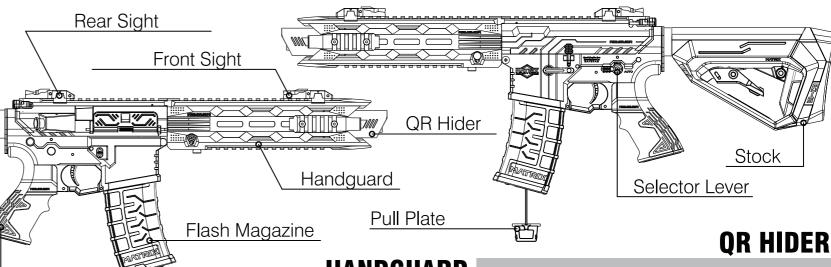





Push the buttom forward to the end. Pull out the handguard.




Slide on the QR hider to your preferred length. The QR hider must cover over half the inner barrel to mount securely.




Rotate the QR hider to securely mount the QR hider. The loose middle piece uses tension to tighten the QR hider, rotate it to the position you want the QR hider to be mounted


CRANE STOCK ADJUSTMENT




Press the release lever to adjust the position of the stock.



1.Push the S-Lock up.






Grip

2. Press the release lever to the end. 3. Pull out the stock.


F/R SIGHT




1. Open top plate when take out. 2. Push the clip.



Place the F/R sight onto the rail.




Close the top plate to fix the position. *Always keep in fix position while using.




Flip F/R sight up/ down.


INSTALLING THE BATTERY




Press the two side buttoms.



Pull out the stock base. Pull the wire set from the stock and connect battery until it clicks.




Insert the battery into the stock or extra chamber which depends on different battery size.




Put on stock base,


CHARGING HANDLE & HOP-UP ADJUSTMENT



Pulling the charging handle to take the bolt back and open the port cover.



⚠ Don't catch your fingers in the dummy bolt. Never hold the gun sideways as the BB pellets will curve right or left.




SETTING MAGAZINE




1. Open the top plate. 2 Load BBs into the chamber and close


the plate when the chamber is full.



Flip the pull plate down.



Pull the plate down 3 times.



Insert the magazine into the airsoft gun until clicks into place.

≜WARNING AVERTISSEMENT

ACHTUNG A

ΑΤΕΝΟΙΌΝ 🕰

CAUTION A

This is not a toy. Careles: questo non è un gioca

ESPAÑA ATTENZIONE 🛦

ATTENTION A